

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 094 460 A2**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
25.04.2001 Bulletin 2001/17

(51) Int. Cl.⁷: **G11B 19/04, G11B 20/10**

(21) Application number: 00309192.3

(22) Date of filing: 18.10.2000

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor:
Miyazaki, Yoshio,
c/o Sony Corporation
Tokyo (JP)

(30) Priority: 20.10.1999 JP 29793799
15.02.2000 JP 2000036807

(74) Representative:
Ayers, Martyn Lewis Stanley et al
J.A. KEMP & CO.
14 South Square
Gray's Inn
London WC1R 5LX (GB)


(71) Applicant: **SONY CORPORATION**
Tokyo (JP)

(54) **Recording apparatus**

(57) A recording apparatus having a reproduction means to play digital data from a recording medium recorded with that digital data and retrieval information, a recording means to write the digital data reproduced by the reproduction means and record the retrieval information on a control table, and a control circuit to search the control table by using the retrieval information when the digital data from the reproduction means is written by the recording means, to permit the writing

of digital data recorded on the medium with the recording means when the retrieval information is not recorded on the control table, and to prohibit the writing of digital data recorded on the medium with the recording means when the retrieval information is already recorded on the control table, and also prevent the mistaken duplicate copying of the digital data with the recording means.

FIG. 1

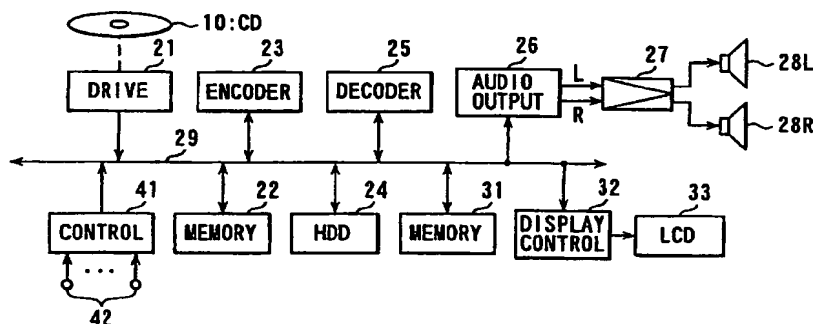

EP 1 094 460 A2

Description

[0001] The present invention relates to a recording apparatus.

[0002] A HDD (hard disk drive) installed in audio device used for instance while mounted in a vehicle and capable of copying the contents of a CD (compact disc) could search for and play a portion of the CD the user wants to hear, faster than a CD changer, etc.

[0003] The capacity of a music CD in such cases is approximately 760 megabytes (equal to approximately $44.1\text{ kHz} \times 16\text{ bits} \times 2\text{ channels} \times 60\text{ seconds} \times 74\text{ minutes}$). The digital audio data of the CD can also be compressed to approximately one-tenth the original size by appropriate use of data compression technology.

[0004] Therefore, even a CD fully stored with music, can be compressed to approximately 80 megabytes of data, so that if a HDD (hard disk drive) of 8 gigabytes is available, then over 100 CD compact discs can be copied onto that HDD.

[0005] In other words, if the contents of a CD can be compressed onto a HDD (hard disk drive) then a much greater quantity of CDs could be handled compared for example to a vehicle mounted CD changer that handles about 10 CDs at one time. Furthermore, the desired CD can also be quickly selected and played back.

[0006] However, when 100 compact discs are copied in a system structured in this way, the same CD is sometimes mistakenly copied twice. In order to avoid such trouble, the user has no other choice but to monitor the copied CDs that requires for instance, making a note of the name of the copied CD.

[0007] However, managing 100 compact discs is very large task. Consequently, the same CD might still be mistakenly copied twice.

[0008] This invention has the goal of resolving this problem with the related art.

[0009] This invention is a recording apparatus having a reproduction means to play for example, digital data and retrieval information for that digital data recorded on a medium, a recording means to record written digital data played by the reproduction means and the retrieval information recorded on a control table, and further having a control circuit to search the control table by using the retrieval information when the digital data from the reproduction means is written by the recording means, and to permit writing of digital data recorded on the medium with the recording means when the results of this search show that the retrieval information is not already recorded on the control table, and to prohibit the writing of digital data recorded on the medium with the recording means, when the results of the search show the retrieval information is already recorded on the control table, consequently, the contents of a recording medium already copied on a recording apparatus are prohibited from being recopied onto the recording apparatus.

[0010] Embodiments of the invention will now be

described, by way of example only, with reference to the accompanying drawings in which:-

FIG. 1 is a system block diagram of the embodiment of the invention.

FIG. 2 is a flowchart showing the operation of the invention.

FIG. 3 is a drawing showing the control table of the invention.

FIG. 4 is a drawing showing a typical display of the invention.

FIG. 5 is a flowchart showing another embodiment of the invention.

[0011] A typical view of the apparatus of this invention centering mainly on the audio signal line is shown in Fig. 1.

[0012] The reference numeral 10 denotes a CD (compact disc) recorded for example with digital audio data for music. When the CD 10 is a compact disc conforming to "CD text" standards, the incidental text (character) information of the CD 10, such as data recorded with the title and performer of CD 10 for example, is recorded in the R through W channels contained in the tracks of the CD 10 lead-in area.

[0013] The CD 10 is reproduced by the reproduction means constituted by the CD drive device 21. Digital audio data for reproduction processing such as demodulation and error correction is extracted from this CD drive device 21, and this digital audio data is supplied to a bus line 29.

[0014] A buffer memory 22 as well as a data compression encoder circuit 23 are connected to the bus line 29. The encoder circuit 23 is comprised for instance by a DSP, and compresses the digital audio data reproduced from the CD 10 to about one-tenth the original size by ATRAC (Adaptive Transform Acoustic Coding) processing (ATRAC is a registered commercial trademark).

[0015] A HDD 24 for instance is connected as a large capacity recording means to the bus line 29. This HDD 24 is for accumulating the digital audio data (digital audio data after digital compression) of the CD 10, and for instance has a capacity of 16 gigabytes. The HDD 24 can therefore record and reproduce compressed digital audio data from at least 100 CD (compact discs).

[0016] At least one control table 24T such as shown in Fig. 3 is provided in the HDD 24. This control table 24T holds information for specifying the write source in Fig. 10 when CD 10 digital audio data was compressed and stored or written in the HDD 24, and also holds the write position (write position per the HDD 24) on each track of the CD 10.

[0017] For example 100 data boxes from #1 to #100 are provided in the control table 24T. Each of these data boxes #1 through #100 corresponds to digital audio data for one CD (compact disc) recorded on the HDD 24. These data boxes #1 to #100 are also used as CD

Nos. when the contents of a CD copied onto the HDD 24 are selected.

[0018] Cells entitled "TOC {Table of Contents} Data", "Number of Tracks", "Track 1 Start Position & End Position", "Track 2 Start Position & End Position" ... "Final Track Start Position & End Position", and "CD Title" are provided in the respective data boxes (CD Nos.) #1 to #100.

[0019] Here, along with the CD10 containing the time information relating to this track in the TOC, each CD 10 also generally has a different TOC. This TOC data is used as data for searching (retrieving) or for designating a particular CD 10. This TOC data is written as search (retrieval) information in the "TOC data" cell.

[0020] All track numbers for the corresponding CD 10 are written in the "Number of Tracks" cell. The respective write start positions and write end positions in the HDD 24 for the respective tracks (tracks in CD 10) are written in the "Track 1 Start Position & End Position" ... "Final Track Start Position & End Position" cells.

[0021] The text (character) data displayed as the title of CD 10 at times such as during reproduction from HDD 24 is written in the "CD Title" cell. For instance, when the CD 10 is a CD of the appropriate standards, the text (character) information recorded in the R through W channels of that lead-in region can be copied and written.

[0022] A decoder circuit 25 and an audio output circuit 26 are also connected to the bus line 29. In this case, the decoder circuit 25 is for instance comprised of a DSP, and performs decode processing complementary to the encoder circuit 23 to decode the compressed digital audio data to return it to digital audio data prior to data compression.

[0023] The audio output circuit 26 contains a D/A converter circuit. When digital audio data is supplied, the D/A converter circuit converts this digital audio data to analog signals L, R by digital/analog conversion. These audio signals L, R are supplied by way of the output amplifier 27 to the left and right channels of the speakers 28L and 28R.

[0024] Along with a buffer memory 31 and a display control circuit 32 connected to the bus line 29, a liquid crystal display (LCD) 33 is for instance connected as a display means to the display control circuit 32 to display various kinds of information.

[0025] A reference numeral 41 denotes a control circuit to control overall operation of the apparatus. This control circuit 41 is for instance comprised of a microcomputer and is connected to the bus line 29. A routine 100 such as shown for example in Fig. 2 is provided in the control circuit 41 as a portion of the program to run the CPU. Detailed information on this routine 100 is given later on but Fig. 2 only shows an excerpt of the routine 100 relating to this invention.

[0026] An operation key 42 comprised of a non-locking type push button switch as the means for user input operation is also connected to the control circuit

41.

[0027] In a structure of this type, by executing the routine 100 with the control circuit 41 microcomputer, [Normal CD reproduction] and [Recording from CD to HDD] are implemented as follows.

[Normal CD reproduction]

[0028] This operation is reproducing (playing) the CD 10 just the same as a typical CD player and obtaining an audio output.

[0029] In other words, when the CD 10 is set into the CD drive device 21, the control circuit 41 CPU starts the processing from step 101 of routine 100, and next in step 102, the TOC data is read out from the CD 10 by the CD drive device 21. This read out (loaded) TOC data is supplied to and stored in the control circuit 41 from the CD drive device 21 by way of the bus line 29 and then is at key input standby in step 103.

[0030] The current case is [Normal CD reproduction] so pressing the reproduction key (play) from among the keys 42, makes the processing precede from step 103 to step 111, and the key input in step 103 is identified.

[0031] The reproduction (play) key is pressed in the current case so the processing precedes from step 11 to step 112. In step 112, the normal reproduction processing for the CD 10 is implemented.

[0032] In other words, the digital audio data is reproduced (played) from the CD 10 by the CD drive device 21, supplied to the audio output circuit 26 from the CD drive device 21 by way of the bus line 29, and D/A (digital/analog) converted to audio signals L, R. These audio signals L, R are supplied to the speakers 28L and 28R by way of the amplifier 27.

[0033] In this case, the track is reproduced (played back) from CD 10 according to the user's instructions and the TOC data stored in the control circuit 41 in step 102 is referred to at this time. Further, information such as the track No. of the track during playback (reproduction) and the elapsed time are displayed on the LCD 33.

[0034] Then, when playback of all tracks specified by the user is finished, the process proceeds to step 119 and the routine 100 ends.

[0035] The apparatus of Fig. 1 can therefore perform reproduction (playback) of the CD 10 in the same way as a typical CD player.

[Recording from CD to HDD]

[0036] This operation is compressing the CD 10 digital audio data and storing or writing this compressed data in the HDD 24.

[0037] In other words, when the CD 10 is set in the CD drive 21, the TOC data is loaded (read out) from the CD 10 as previously described and stored in the control circuit 41, and afterwards set to key input standby in step 103.

[0038] The current case is [Recording from CD to HDD] so that pressing one of the copy keys 42, makes the operation processing precede from step 103 to step 111, and the key input in step 103 is identified.

[0039] When identified in the current case, the copy key was pressed so the processing proceeds from step 111 to step 121. In step 121, the "TOC data" cell of the data in the control table 24T is searched for as the retrieval text for the TOC data loaded (read out) in step 102.

[0040] Then, the subsequent processing of retrieval (search) results is performed in other words, in step S122, the search (retrieval) results of step 121 are identified, and when the TOC data loaded in step 102 is not in the "TOC data" cell of control table 24T, the processing then proceeds from step 122 to step 123. In step 123, the CD 10 is copied onto the HDD 24.

[0041] In other words, the digital audio data from the CD 10 is reproduced by the CD drive device 21. This digital audio data, along with being written in the memory 22 from the CD drive 21 by way of the bus line 29, is also loaded (read out) from the memory 22 at the specified timing. Then, this read-out digital audio data is supplied to the encoder circuit 23 by way of the bus line 29 and data-compressed by ATRAC processing and the now compressed digital audio data is supplied to the HDD 24 by way of the bus line 29. In this way, the CD 10 digital audio data is written into the HDD 24 while data-compressed.

[0042] At this time, the information copied from CD 10 and tracks (tracks in CD 10) is registered in the control table 24T of the HDD 24. In other words, if the copy of CD 10 is the No. nth ($n = \text{any of } 1 \text{ to } 100$), then the TOC data stored in the control circuit 41 that was loaded from the CD 10 in step 102, is written in the "TOC data" cell of the CD #n box of control table 24T. The number of tracks of CD 10 is also written in the "number of tracks" cell of the CD No. #n box.

[0043] Further, the write start position and write end position when the digital audio data of CD 10 is written into HDD 24, are written into the corresponding cell from among the "Track 1 Start Position & End Position" "Final Track Start Position & End Position" cells of the CD #n box.

[0044] When the text (character) information for the CD 10 and tracks is input from the keys 42, that character data is stored in the memory 31, and when copying of the CD 10 is complete, that text information that was loaded from the memory 31, is written in the "Title" cell of the CD #n box of the control table 24T. When the CD 10 data has CD text, that text (character) information added to CD 10 is also written.

[0045] In this way, when the contents of the CD 10 are written into HDD 24, the corresponding portion of the control table 24T is also rewritten.

[0046] When the above processing is complete, the processing proceeds from step 123 to step 119, and routine 100 ends.

[0047] Therefore, when a CD 10 is not yet copied onto the HDD 24, information specifying that CD 10 is registered in the control table 24T along with the copied contents of that CD 10.

[0048] In step 122 on the other hand, when the TOC data read out in step 102 is in the "TOC Data" cell of the control table 24, the processing proceeds from step 122 to step 131. In step 131, the specified data is supplied from the control circuit 41 by way of the bus line 29 to the display control circuit 32. As a result, as shown for instance in Fig. 4, a string of characters constituting a caution sentence is displayed to show that the CD 10 whose copy is being attempted, has already been copied onto the HDD 24.

[0049] Next, the processing proceeds to step 132 and the CD 10 is ejected from the CD drive device 21 in compliance with instructions from the control circuit 41. This routine then ends in step 119.

[Reproducing from HDD]

[0050] In this operation, the contents of the CD copied onto the HDD 24 are played back (reproduced). The processing routine for this playback is not shown in the drawings.

[0051] In other words, when playback from the HDD 24 is commanded by way of the keys 42, the data from the "Title Cell" cell of the data boxes registered from among the data boxes #1 to #100 of the control table 24T is read out. This data and the data for the matching CD #n are supplied to the display control circuit 32. Consequently, the CD #n and corresponding display with the "Title" are displayed in the LCD 33.

[0052] When the keys 42 are operated and the desired CD #m then input, the data written into the cells from among the "Number of Tracks" through "Title" cells of the control table 24T boxes is read out, and stored in the control circuit 41.

[0053] Next, by using the data stored in this control circuit 41 in the same way as the TOC data written on the CD, the digital audio data corresponding to the CD #m in the CD contents, are loaded from HDD 24 and output as audio.

[0054] In this case, the digital audio data, when loaded from the HDD 24, is supplied to the decoder circuit 25 and expanded to the original audio data after being buffered by the memory 22. This now expanded digital audio data is then supplied to the audio output circuit 26. The playback (or reproduction) audio from the digital audio data loaded from the HDD 24 is therefore output from the speakers 28L and 28R.

[0055] Information such as the track No. and elapsed time of the track (CD track) being played back is displayed on the LCD 33 even during playback (reproduction) from the HDD 24.

[Summary]

[0056] Thus, in the reproduction device of Fig. 1, when the contents of the CD 10 are copied onto the HDD 24, a check can be made to find whether or not all of that CD 10 was copied, by referring to the control table 24T, and copy implemented only when the content were found not to have been copied. Therefore, by preventing the same CD from being copied twice, the useless expenditure of the memory capacity for instance of the HDD 24 can be prevented.

[0057] Furthermore, monitoring by the user is not required for checking whether or not a CD was copied onto the HDD 24 and duplicate copying is automatically prevented.

[0058] Also, when not known whether copy of a particular CD onto the HDD 24 is finished, that CD can be inserted into the CD drive device 21 and the copy key operated. If not previously copied, a copy of that CD is then made onto the HDD 24, however if copying has already been completed, then a message showing copy was already completed is displayed and duplicate copying is not implemented.

[0059] Consequently, the above processing requires no special hardware and is accomplished just by providing the control table 24T in the HDD 24.

[0060] Furthermore, desired text information can be written into the "Title" cell of the control table 24T so that information such as a special title can be attached to that copy when the CD is copied onto the HDD 24.

[Other embodiments]

[0061] In one case in the routine 100 of Fig. 5, when the CD 10 has previously been copied onto the HDD 24, the process proceeds after step 132 to step 133, and the contents of the CD 10 whose copy onto the HDD 24 was attempted are reproduced (played back) from the HDD 24.

[0062] Therefore, in this case, when the copying of a CD already copied onto the HDD 24 is again attempted, not only is a caution display issued on the LCD 33, but a check can also be made by playing back the audio.

[0063] The information written in the "Title" cell of the control table 24T as described above, can also be collected and written at some other time after copying onto the HDD 24 and in such cases, after copy of the CD contents is complete, information such as the date and time the copy was made can also be written by default.

[0064] Information written into the "Title" cell can be written into a nonvolatile memory. The CD 10 can also be reproduced (played) and when those contents are copied into the HDD 24, the reproduction speed can be a higher speed than the standard speed. The control table 24T may be made to show the corresponding relation of the TOC data with the digital audio data written in

the HDD 24.

[0065] The invention as described above, renders the effect that mistaken copying of the same CD twice is prevented and that the wasted expenditure of memory capacity for instance of the HDD is eliminated. Further, whether a CD has been copied or not onto the HDD can be known without requiring any monitoring by the user and double copying of the CD can automatically be prevented.

[0066] This invention renders the further effect that, when not known whether copy of a particular CD is finished or not, the copy of that CD can be attempted, and if not previously copied, then copying of that CD is then executed. However, if the CD was previously copied, then duplicate (two-time) copying of the CD is prevented. Furthermore, the above process is accomplished just by providing a control table in the HDD and no special hardware is required.

Claims

1. A recording apparatus comprising:

reproduction means to play digital data from a recording medium recorded with that digital data and retrieval information;
recording means to write the digital data reproduced by said reproduction means and record said retrieval information on a control table; and
a control circuit to search the control table by using the retrieval information when the digital data from the reproduction means is to be written by said recording means; permit the writing of digital data recorded on said medium into said recording means when said retrieval information is not already recorded in said control table; and prohibit the writing of digital data recorded on said medium into said recording means when said retrieval information is already recorded on said control table.

2. A recording apparatus according to claim 1, wherein: said reproduction means comprises a drive device to reproduce digital audio data from a medium recorded with digital audio data;

said recording means comprises a hard disk drive device written with digital audio data reproduced from said recording medium by said drive device;
and said apparatus further comprises a control table containing retrieval information for the medium written with said digital audio data in said hard disk drive device from among said mediums.

3. A recording apparatus according to claim 2, wherein said recording apparatus comprises dis-

play means connected to said control circuit and when said control circuit prohibits writing onto the hard disk drive device of digital audio data recorded on said medium, said display means shows information indicating that writing is prohibited.

5

4. A recording apparatus according to claim 2 or claim 3, wherein when writing the digital audio data reproduced from said medium onto said hard disk drive device, said control circuit first compresses the digital audio data reproduced from said medium and writes the compressed digital audio data onto said hard disk drive device. 10
5. A recording apparatus according to claim 4, wherein in said control table, digital audio data is paired with retrieval information for the medium written with digital audio data in said hard disk drive device, and said control table also has data showing the write position of said digital audio data in said hard disk drive. 15 20
6. A recording apparatus according to claim 5, wherein in said control table, retrieval information for the medium written with digital audio data in said hard disk drive device is paired with data showing the write position of said digital audio data in said hard disk drive, and said control table has character data displayed as text information in said display device. 25 30
7. A recording apparatus according to any one of claims 3 to 6, wherein when prohibiting the writing onto said hard disk drive device of digital audio data recorded on said medium, said control circuit along with showing by said display means that writing is prohibited, also ejects said medium from said drive device. 35
8. A recording apparatus according to claim 7, wherein when prohibiting the writing onto said hard disk drive device of digital audio data recorded on said medium, along with showing by said display means that writing is prohibited, and also ejecting said medium from said drive device, the digital audio data corresponding to digital audio data on said medium is loaded from said hard disk drive device and output. 40 45

50

55

FIG. 1

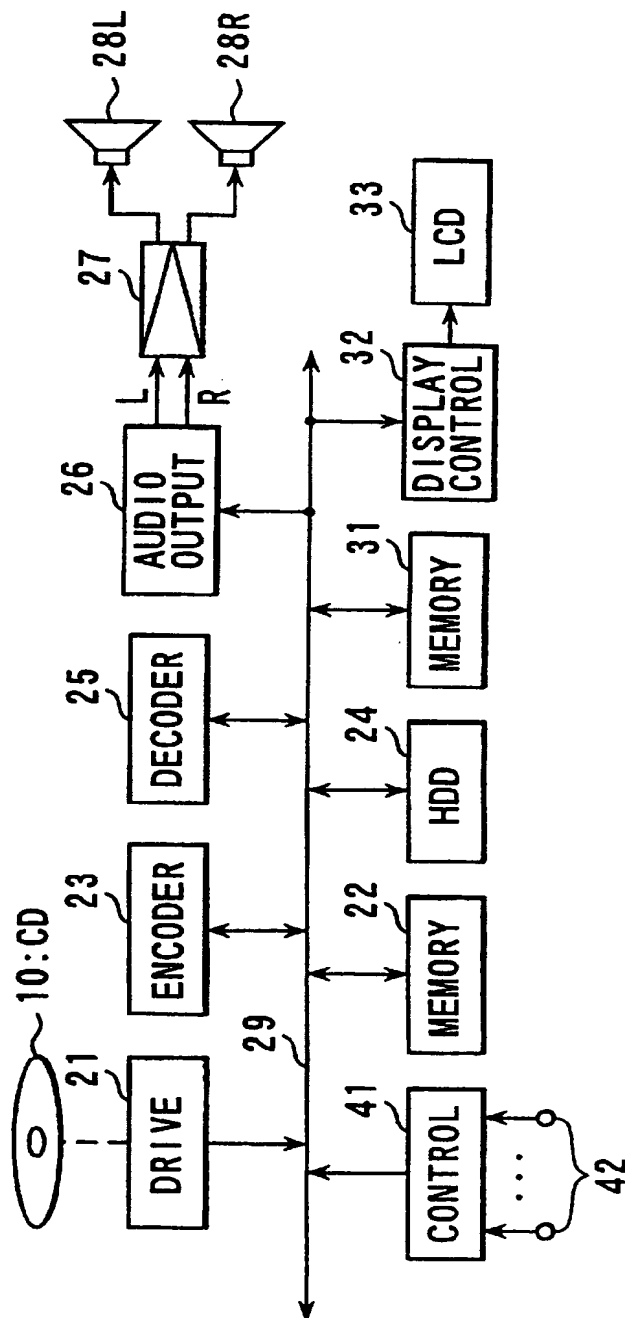


FIG. 2

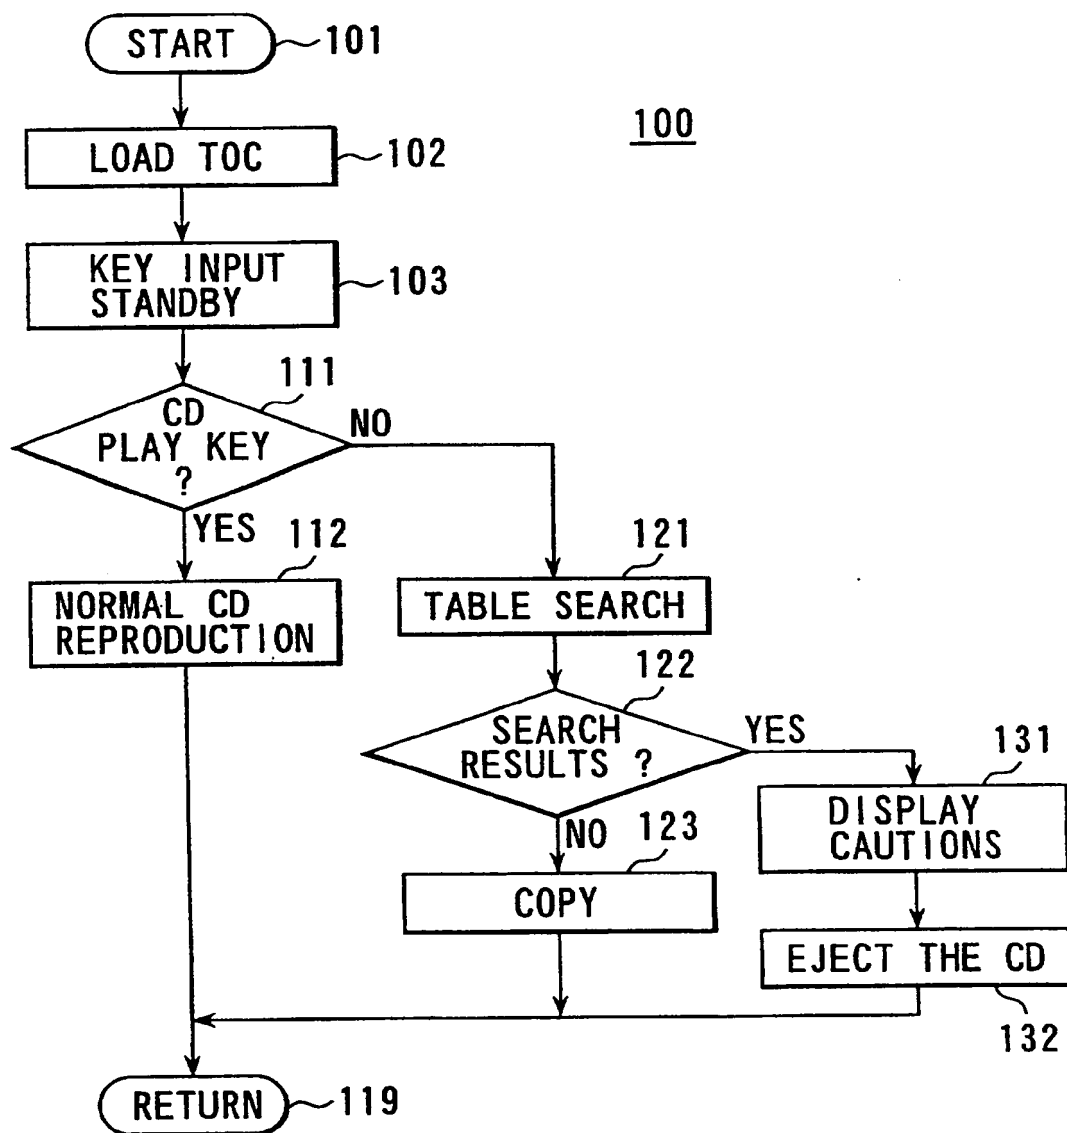


FIG. 3

	TOC DATA	NUMBER OF TRACKS	TRACK 1		TRACK 2		TRACK 99		TITLE
			START POSITION	END POSITION	START POSITION	END POSITION		START POSITION	END POSITION	
#1	XXX	XX	XX	XX	XX	XX		--	--	XXXX
#2										
#3										
.										
.										
.										
.										
.										
.										
.										
.										
#100										

24T

FIG. 4


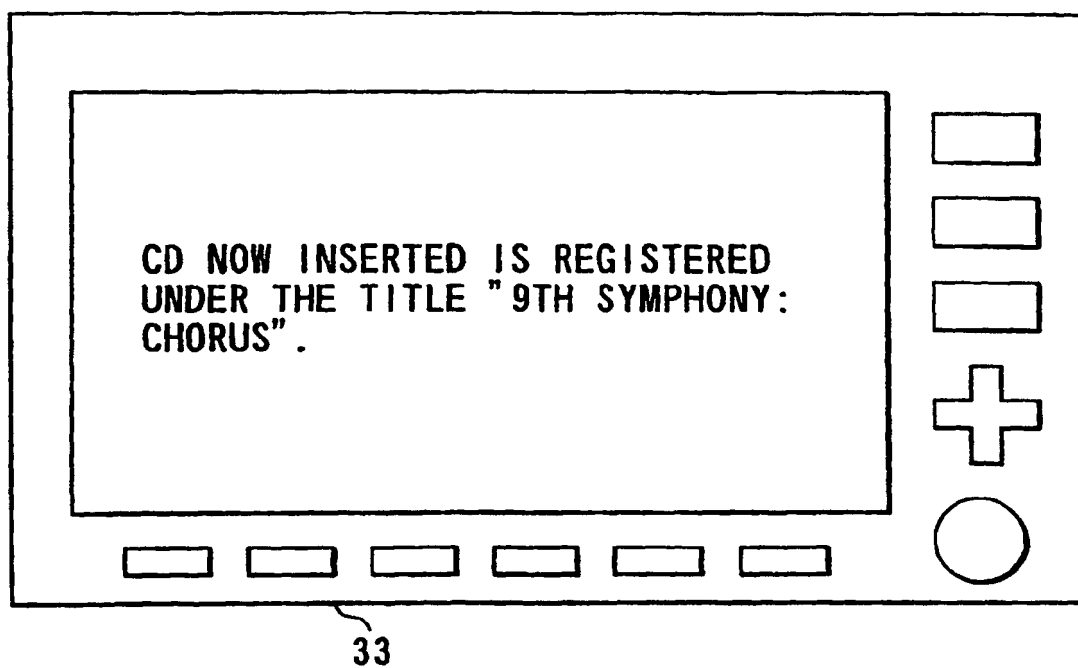


FIG. 5





Europäisches Patentamt
European Patent Office
Office européen des brevets

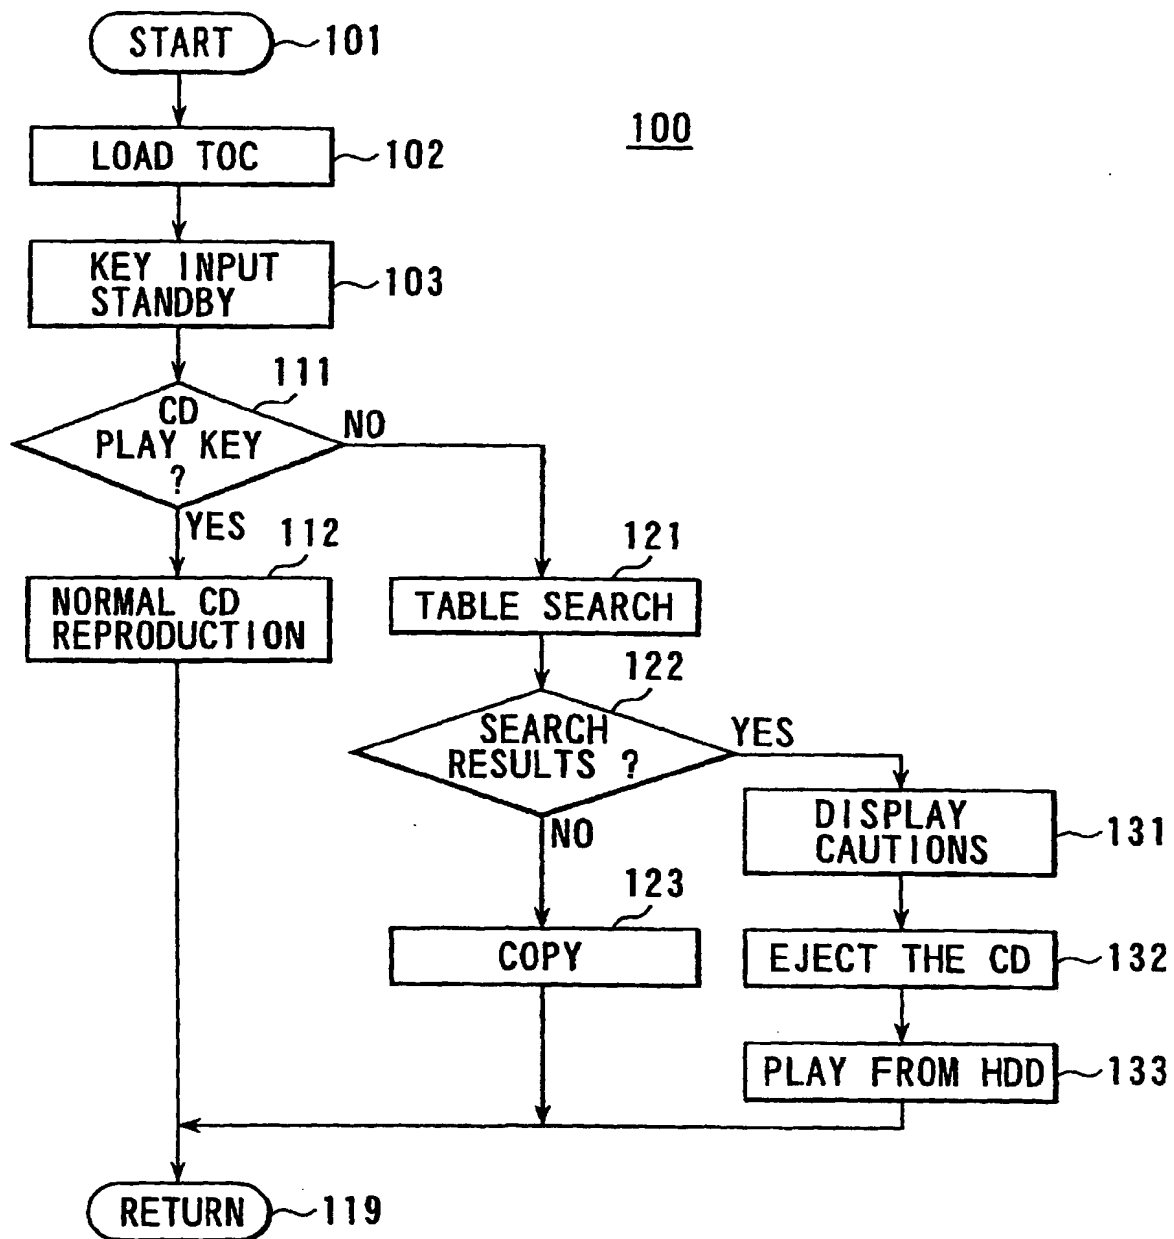

(11) **EP 1 094 460 A3**

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
29.01.2003 Bulletin 2003/05

(51) Int Cl.7: **G11B 19/04**, G11B 20/10,
G11B 7/28, G11B 31/00

(43) Date of publication A2:
25.04.2001 Bulletin 2001/17

(21) Application number: **00309192.3**

(22) Date of filing: **18.10.2000**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: **Miyazaki, Yoshio, c/o Sony Corporation
Tokyo (JP)**

(30) Priority: **20.10.1999 JP 29793799**
15.02.2000 JP 2000036807

(74) Representative: **Ayers, Martyn Lewis Stanley et al
J.A. KEMP & CO.,
14 South Square,
Gray's Inn
London WC1R 5JJ (GB)**


(71) Applicant: **SONY CORPORATION
Tokyo (JP)**

(54) **Recording apparatus**

(57) A recording apparatus having a reproduction means to play digital data from a recording medium recorded with that digital data and retrieval information, a recording means to write the digital data reproduced by the reproduction means and record the retrieval information on a control table, and a control circuit to search the control table by using the retrieval information when the digital data from the reproduction means is written

by the recording means, to permit the writing of digital data recorded on the medium with the recording means when the retrieval information is not recorded on the control table, and to prohibit the writing of digital data recorded on the medium with the recording means when the retrieval information is already recorded on the control table, and also prevent the mistaken duplicate copying of the digital data with the recording means.

FIG. 1

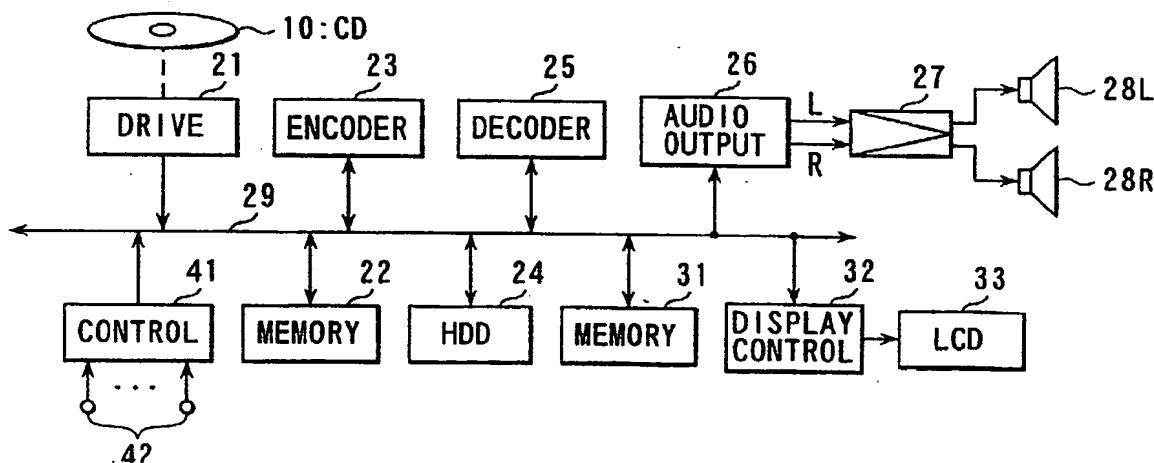

EP 1 094 460 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 30 9192

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	US 5 581 740 A (JONES CRAIG S) 3 December 1996 (1996-12-03) * the whole document *	1	G11B19/04 G11B20/10 G11B7/28 G11B31/00
A	US 5 633 839 A (ALEXANDER GREGORY ET AL) 27 May 1997 (1997-05-27) * the whole document *	1,2	
A	EP 0 786 774 A (SONY CORP) 30 July 1997 (1997-07-30)		
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			G11B
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 9 December 2002	Examiner Benfield, A
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 30 9192

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

09-12-2002

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5581740	A	03-12-1996	NONE	
US 5633839	A	27-05-1997	NONE	
EP 0786774	A	30-07-1997	EP 1124229 A2	16-08-2001
			EP 1124178 A2	16-08-2001
			EP 0786774 A2	30-07-1997
			JP 9265731 A	07-10-1997
			US 5870710 A	09-02-1999

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

THIS PAGE BLANK (USPTO)